

Integrated gripper

Integrated gripper for tiltrotators and rotators 3–33 tonnes

- » The gripper arms are made from high-strength steel for strength and low weight.
- » Load-holding check valves in each gripper cylinder.
- » The perfect workmate on the site.
- » Versatile handling of posts, kerbstones and other objects.
- » Practical for pipe laying and manhole positioning.
- » Available for tiltrotators/rotators EC204, EC206, EC209, EC214, EC219, EC226 and EC233.
- » 3 finger claws as standard.
- » Complies with European safety standards.

Advantages of the GR30 (S80):


- Gripper width up to 1,080 mm



Specifications

Model	GR05	GR10	GR30*
Widest grab width A: (mm)	350	610	1,080
Width B: (mm)	200	270	440
Length C: (mm)	585	760	980
Clamping force (tip - tip) at 21 MPa: (kg)	1,654	1,497	1,956
Max load: (kg)	1,000	1,500	2,200
Weight: (kg)*	50	70	148
Max hydraulic pressure: (MPa)	22	22	22

* Depending on attachment

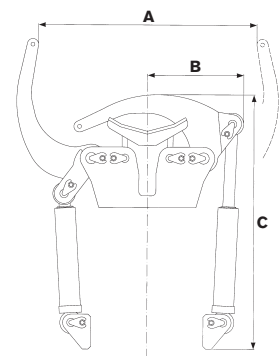

CHANGE THE WORLD OF DIGGING

engcon International | Box 111, SE-833 22 Strömsund, Sweden
 Phone +46 670 178 00 | E-mail international@engcon.com | Web engcon.com