

Integrated gripper

Integrated gripper for EC214 and EC219*

The GR20R2 integrated gripper is specially developed for the tough environments that grippers are exposed to on the railway, where a gripper will often be used to pull and lift heavy rails with excavators.

Advantages:

- » Robust construction designed for heavy and difficult usage, such as in the railway industry.
- » Angled down up to 42 degrees
- » Large grab width – 820 mm
- » Protected cylinders


* Standard hitch combinations: S45 and S60.

Other hitch combinations may be available – please ask.

Specifications

Model	GR20R2
Largest grab width A: (mm)	820
Width B: (mm)	380
Length: (mm)	Depending on the hitch
Weight: (kg)	140
Clamping force at 21 Mpa: (kg)	1,750
Angled at 35-42° depending on the hitch	
Detachable	
Protected cylinders	

Note! GR20R2 cannot be combined with all quick hitches on the market. Contact Engcon for further information.

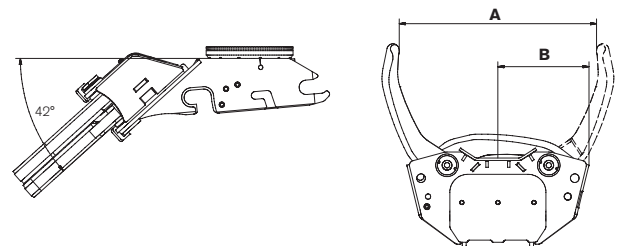

CHANGE THE WORLD OF DIGGING

engcon International | Box 111, SE-833 22 Strömsund, Sweden

Phone +46 670 178 00 | E-mail international@engcon.com | Web engcon.com