

# Integrated gripper

## Integrated gripper for tiltrotators and rotators 3–33 tonnes

- » The gripper arms are made from high-strength steel for strength and low weight.
- » Load-holding check valves in each gripper cylinder.
- » The perfect workmate on the site.
- » Versatile handling of posts, kerbstones and other objects.
- » Practical for pipe laying and manhole positioning.
- » Available for tiltrotators/rotators EC204, EC206, EC209, EC214, EC219, EC226 and EC233.
- » 3 finger claws as standard.
- » Complies with European safety standards.

### Advantages of the GR30 (S80):


- ▶ Gripper width up to 1,080 mm



### Specifications

| Model                                      | GR05  | GR10  | GR30* |
|--|-------|-------|-------|
| Widest grab width A: (mm)                  | 350   | 610   | 1,080 |
| Width B: (mm)                              | 200   | 270   | 440   |
| Length C: (mm)                             | 585   | 760   | 980   |
| Clamping force (tip - tip) at 21 MPa: (kg) | 1,654 | 1,497 | 1,956 |
| Max load: (kg)                             | 1,000 | 1,500 | 2,200 |
| Weight: (kg)*                              | 50    | 70    | 148   |
| Max hydraulic pressure: (MPa)              | 22    | 22    | 22    |

\* Depending on attachment

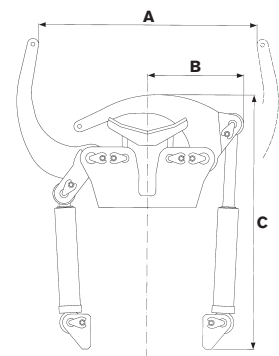

**CHANGE THE WORLD OF DIGGING**

engcon Ireland Ltd. | Bellview, 1 Station Road, Leixlip, co. Kildare, W23 N6C6  
 Phone +353 15 686 742 | E-mail ireland@engcon.com | Web engcon.com