

Integrated grabber GR05-GR30

engcon[®]

GR05-GR30: Integrated grabber for tiltrotators and rotators 3-33 metric tons

- The grabber arms are made from high-strength steel for strength and low weight
- Safe lifting with check valves in each grapple cylinder
- The perfect workmate on the site
- Versatile handling of posts and curbstones, and other objects
- Practical for pipe laying and manhole positioning
- Available for tiltrotators/rotators EC206, EC209, EC214, EC219, EC226, EC233 and EC30
- 3-finger claws are standard
- Complies with European safety standards

GR20B Features:

- ▶ Grip width 32.3-37.4* inches depending on the quick coupler
- ▶ Stronger grapple guard ▶ Fixed torque reaction bar
- ▶ Improved axle locks * S60GR20, QS60GR20 and S1GR20: 32.3 inches
S70GR20, QS70GR20 and S2GR20: 37.4 inches

Feature GR30 (S80 and S3):

- ▶ Grabber grasp up to 42.5 inches.

GR05 | GR10 | GR20B | GR30




THE MARKET'S WIDEST GRASP

Specifications

Type	GR05	GR10	GR20B	GR30**
Largest grip width A: (inches)	13.8	24	32.3-37.4*	42.5
Width B: (inches)	7.9	10.6	13.8	17.3
Length C: (inches)	23	29.9	35.8	38.6
Weight (lbs)*	110	154	187	326
Max hydraulic pressure: (psi)	3,191	3,191	3,191	3,191
Grab force at 3046 psi: (lbs)	3,639	3,293	4,915	4,303

* Depending on bracket. ** GR30 only fits S80 and S3 brackets

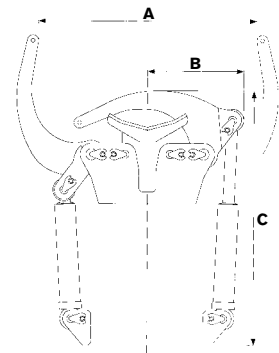

TOOL SYSTEMS FOR INCREASED PROFITABILITY

engcon North America Inc. 222 Elm street #4, North Haven, CT 06473
Phone (646) 851 0104 | Email northamerica@engcon.com | www.engcon.com