


GS30–GS80 | GS1–GS3

GS30–GS80, GS1–GS3: For all excavators in the 1-33 metric ton weight range


- Easy to modify buckets for engcon quick couplers
- Robust, reliable and affordable
- Welded, high-strength steel design

GS30–GS80 | GS1–GS3

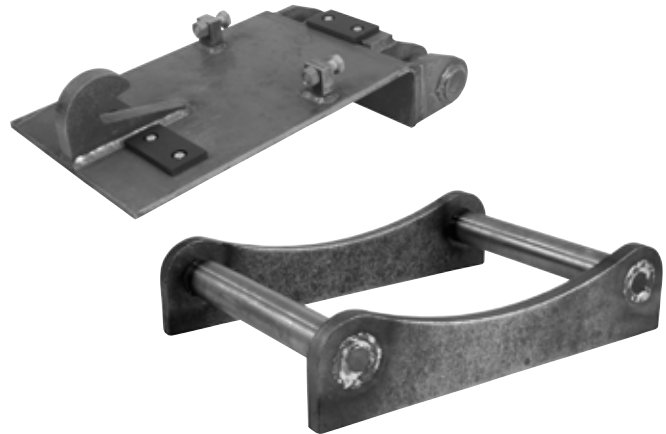

Specifications

Type	GS30/ 150	GS30/180	GS40/200	GS40/240	GS45	GS50	GS60	GS70	GS80	GS1	GS2/27	GS3
Axle diameter A: (inches)	1.2	1.2	1.6	1.6	1.8	2	2.4	2.8	3.1	2.8	3.1	3.9
Width B: (inches)	5.9	7.1	7.9	9.4	11.4	10.6	13.4	17.7	23.2	15.7	17.7	24.4
Length C: (inches)	7.9	9.1	11.8	11.8	16.9	16.9	18.9	23.6	26.4	29.5	31.9	34.3
Suitable for engcon RF:	S30	S30	S40, RF10 B10	S40	S45 RF12 B12	S50 RF14 KM05	S60 RF16, S6 KM08	S70 RF25 KM09	S80 RF32	S1 RF20 B20	S2/27	S3 RF30

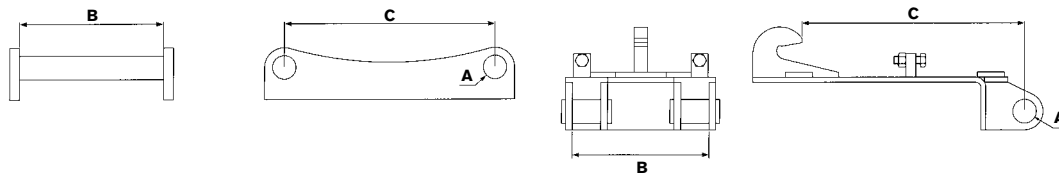

TOOL SYSTEMS FOR INCREASED PROFITABILITY

engcon North America Inc. 222 Elm street #4, North Haven, CT 06473
Phone (646) 851 0104 | **Email** northamerica@engcon.com | www.engcon.com