

Integrated grabber

Integrated grabber for tiltrotators and rotators 7,260-72,600 lbs (3-33 metric ton)

- » The grab arms are made from high-strength steel for strength and low weight
- » Check valves in each grab cylinder
- » The perfect workmate on the site
- » Versatile handling of posts and curbstones, and other objects
- » Practical for pipe laying and manhole positioning
- » Available for tiltrotators/rotators EC204, EC206, EC209, EC214, EC219, EC226, EC233 and EC30
- » 3-finger claws as standard
- » Complies with European safety standard

Feature GR30 (S80 and S3):


- Grabber grasp up to 42.5 inches



Specifications

Model	GR05	GR10	GR30*
Widest grabber width A: (inch)	13.8	24	42.5
Width B: (inch)	7.9	10.6	17.3
Length C: (inch)	23.0	29.9	38.6
Clamping force, tip - tip, at 21 MPa: (lbs)	3646	3300	4312
Max load: (lbs)	2205	3307	4850
Weight: (lbs)*	110	154	326
Max hydraulic pressure: (psi)	3200	3200	3200

* Depending on attachment

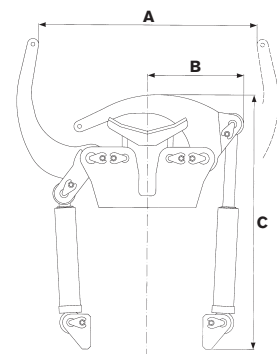

CHANGE THE WORLD OF DIGGING

engcon North America Inc. | 2666 State Street, Hamden CT 06517
Phone +1 203 691 5920 | **Email** northamerica@engcon.com | **Web** engcon.com