

Integrated gripper

Integrated gripper for EC214 and EC219*

The GR20R2 integrated gripper is specially developed for the tough environments that grippers are exposed to on the railway, where a gripper will often be used to pull and lift heavy rails with excavators.

Advantages:

- » Robust construction designed for heavy and difficult usage, such as in the railway industry.
- » Angled down up to 42 degrees
- » Large grab width – 820 mm
- » Protected cylinders

* Standard hitch combinations: S45 and S60.


Other hitch combinations may be available – please ask.



Specifications

Model	GR20R2
Largest grab width A: (mm)	820
Width B: (mm)	380
Length: (mm)	Depending on the hitch
Weight: (kg)	140
Clamping force at 21 Mpa: (kg)	1,750
Angled at 35-42° depending on the hitch	
Detachable	
Protected cylinders	

Note! GR20R2 cannot be combined with all quick hitches on the market. Contact Engcon for further information.

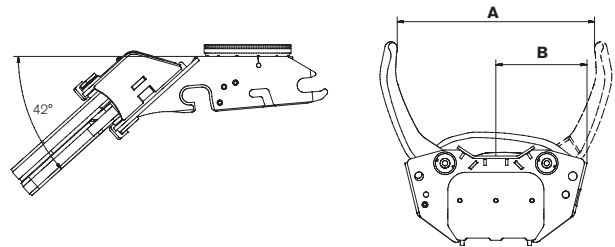

CHANGE THE WORLD OF DIGGING