


Detachable grabber

For all excavators in the 13,200-57,300 lbs (6-26 metric ton)


Engcon's new detachable grabber cassette is also retrofittable.

The grabber cassette simply hooks onto the Q-Safe-D quick coupler and is then locked in place and the hydraulics connected in a single maneuver – a procedure that takes less than a minute.

The grabber is angled at 15 degrees to the plane of rotation, giving a longer reach.

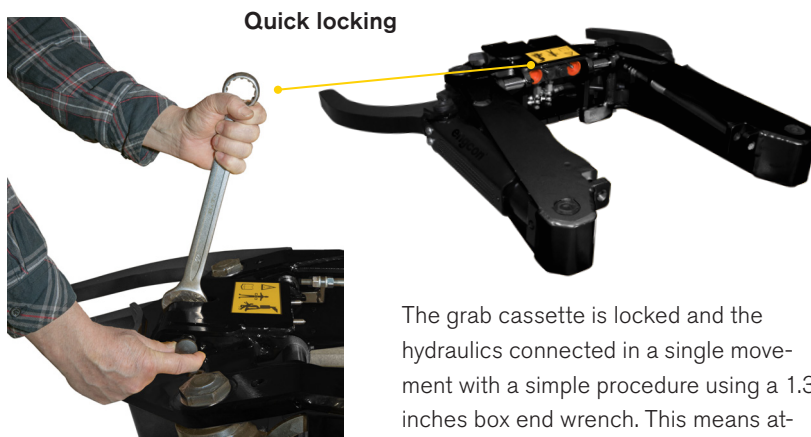

The grab cassette is locked and the hydraulics connected in a single movement with a simple procedure using a 1.3 inches box end wrench. This means attaching or detaching in less than a minute.

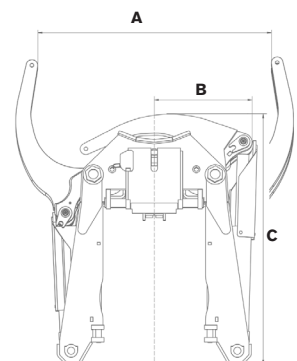

Specifications

Model	GRD40	GRD45	GRD60	GRD70
Grab width A: (inch)	16.9	24	32.3	37.4
Width B: (inch)	8.7	10.6	14	16.1
Length C: (inch)	21.3	28.3	34.3	35.4
Clamping force (tip - tip) at 3200 psi: (lbf)	2646	3307	4850	4850
Max load: (lbs)	2205	3307	4409	4409
Weight: (lbs)	99.2	218.3	337.3	372.6
Max hydraulic pressure: (psi)	3191	3200	3200	3200
Fits quick hitch:	S40	S45	S60	S70

CHANGE THE WORLD OF DIGGING

engcon Canada Inc | 3220 Av. Jacques-Bureau, Laval QC H7P 0A9

E-mail canada@engcon.com | **Web** engcon.com