

Detachable Sweeper

For all excavators in the 4–19 tonne weight classes

The Detachable Sweeper (SWD) – engcon's detachable rotating brush – can also be retrofitted.

Just like with the gripper cassette GRD, the SWD rotating brushes can be retrofitted simply on the Q-Safe-D quick hitch by being hooked onto the hitch's two mounting hooks. The rotating brushes are then locked and connected to the hydraulics in a single action – quick and easy.

SWD is driven by a powerful hydraulic motor and is raised or lowered by a hydraulic ram.

The SWD is flexible and its width can be adjusted for the job in hand, from cable sweeping to sweeping large areas.

This reduces the need for manual labour and makes a safer workplace. SWD is available in several widths and is adapted for the engcon Q-Safe Detachable quick hitch.



Specifications

Model	SWD40	SWD45	SWD60
Length, cassette A: (mm)	451	586	665
Length, arm B: (mm)*	843	875	975
Width, cassette C: (mm)	314	362	423
Width, guard D: (mm)**	340, 1 200	450, 1 400	450, 1 600
Height, guard E: (mm)	660	660	660
Max total length A+F (mm)**	1 525	1 710	1 998
Diameter, brush G: (mm)***	600, 700	600, 700	600, 700, 915
Width, brush H: (mm)	320, 1 200	420, 1 400	420, 1 600
Maximum weight: (kg)**	127	186	210
Oil flow min/max: (l/min)	20/50	20/60	20/60
Quick hitch standard:	S40	S45	S60


* In the standard version

** Depends on sweeper brush

*** 915 mm can only be used with long arm (975 mm)

Included brushes:

SWD40: 320 mm, SWD45: 420 mm, SWD60: 420 mm.

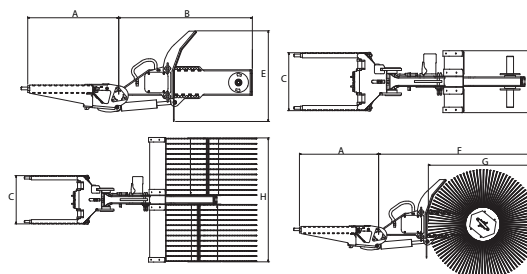

CHANGE THE WORLD OF DIGGING

engcon Australia | Unit 2, 18 Peter Brock Drive, Eastern Creek, NSW 2766

Tel +61 2 7252 5279 | **E-mail** australia@engcon.com | **Web** engcon.com